


附件

六角头套筒

零件号NO.	套筒尺寸(mm)					方头F
	A	B	C	D	E	
900-028-0	16	19	5.3	9.4	10	9.5
900-044-0	20	21	5.5	11.4	11	
900-056-0	22	25	6.5	12.0	13	
900-064-0	22	25	6.5	15.4	14	
900-132-0	23	30	6.5	14.0	13	12.7
900-140-0	24	30	6.5	14.0	14	
900-153-0	28	31	7.5	15.0	17	
900-170-0	30	35	8.5	15.0	19	
900-176-0	35	38	9.5	18.0	21	
900-187-0	36	40	9.5	19.0	22	
900-193-0	37	41	10.0	20.0	23	15.9
900-243-0	33	37	8.5	15.0	19	
900-248-0	35	38	9.5	18.0	21	
900-255-0	36	40	10.0	17.0	22	
900-260-0	37	41	10.0	18.0	23	
900-266-0	38	42	11.0	19.0	24	
900-269-0	40.5	44	12.0	24.0	26	19.0
900-342-0	40	48	11.0	21.0	24	
900-347-0	43	49	12.0	22.0	26	
900-360-0	45	50	14.0	23.0	27	
900-377-0	48	52	15.0	27.0	30	
900-380-0	50	54	15.0	29.0	32	
900-390-0	54	57	17.0	32.0	35	25.4
900-400-0	55	58	17.0	33.0	36	
900-464-0	54	57	15.0	29.0	32	
900-475-0	54	60	17.0	32.0	35	
900-483-0	56	60	17.0	32.0	36	
900-499-0	62	66	19.0	38.0	41	
900-512-0	68	70	21.0	42.0	46	25.4
900-519-0	78	76	24.0	48.0	50	


零件号NO.	套筒尺寸(mm)					方头F
	A	B	C	D	E	
900-580-0	64	66	19.0	31.0	41	31.8
900-587-0	70	70	21.0	35.0	46	
900-601-0	78	75	24.0	40.0	50	
900-605-0	82	80	27.0	45.0	54	
900-609-0	82	80	27.0	45.0	55	
900-610-0	88	83	29.0	48.0	58	
900-613-0	90	86	30.0	51.0	60	38.1
900-653-0	100	98	33.0	53.0	67	
900-655-0	109	100	36.0	55.0	70	
900-660-0	115	103	38.0	58.0	77	
900-664-0	120	107	40.0	62.0	80	
900-666-0	125	111	43.0	66.0	85	
900-694-0	120	114	38.0	68.0	77	44.4
900-697-0	125	117	41.0	71.0	80	
900-700-0	145	130	48.0	84.0	95	
900-706-0	165	140	60.0	94.0	110	
900-744-0	164	140	60.0	89.0	110	50.8
900-750-0	194	157	70.0	106.0	130	
900-752-0	196	162	64.0	111.0	135	
900-754-0	210	171	79.0	120.0	145	63.5
900-780-0	95	120	30.0	47.0	58	
900-786-0	155	142	41.0	69.0	95	
900-794-0	252	206	83.0	143.0	175	

六角头套筒

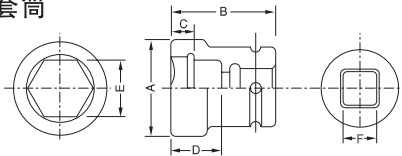


全螺纹螺栓用套筒

套筒公称螺栓直径尺寸(mm)									型式
mm	in	A	B	C	D	E	F		
903-002-0	6	-	16	29	9.0	M6	5/32	9.5	UW-ST6SHK
903-035-0	-	-	16	19	9.0	W1/4-20	5/32	9.5	UW-ST6SSHK
903-003-0	8	-	17	35	16.0	M8	7/32	9.5	UX-ST800
903-103-0	8	-	17	39	16.0	M8	7/32	12.5	UW-ST9SK
903-105-0	10	-	19	41	18.5	M10	9/32	12.5	UW-ST10SHK
903-137-0	-	-	19	41	18.5	W3/8-16	9/32	12.5	UX-ST1000



刀头夹头组件


零件号NO.	A	B	C	D
907-000-0	22	41	6.35Hex	9.5Sq
907-050-0	24	46	8.0Sq	12.7Sq



请不要使用于UX-1000/UW-10SHK或更大的型式，因为转矩太大不能使用上面的组件。


接头组件

零件号NO.	A	B	C
906-000-0	45	20	9.5
906-020-0	69	30	12.7
906-040-0	84	46	12.7




油脉冲扳手专用加长杆

为使扳手性能最佳，专门设计了以下加长杆以便与扳手主轴更深地连接，减少转矩下降与晃动。




标准型



专用加长杆



零件号NO.	B (mm)	A及C 方头	套筒定位 销型式	型式
904-049-0	75	9.5mm (3/8")	OP-P 型	UX-450
904-050-0	100			UX-500
904-051-0	150			UX-612
904-075-0	190			UX-(T)700(L)
904-052-0	254			UX-(T)800
904-054-0	300			
904-053-0	320			
904-155-0	76	12.7mm (1/2")	OP-P 型	UX-(T)900
904-156-0	125			
904-157-0	204			
904-158-0	254			
904-159-0	355			

零件号NO.	B (mm)	A及C 方头	套筒定位 销型式	型式
904-168-0	76	12.7mm (1/2")	OP-P 型	UX-(T)1000
904-169-0	125			UX-(T)1300
904-172-0	204			UX-(T)1400
904-173-0	355			
904-350-0	76	19.05mm (3/4")	O-形 圈型	UX-(T)1620
904-352-0	100			UXR-(T)1820
904-351-0	150			UXR-2000(S)
904-353-0	200			UXR-(T)2000
904-455-0	200	25.4mm (1")	O形 圈型	UXR-2400S
				UXR-3000S




空气软管平衡器

“线路卷盘”空气软管平衡器，未使用任何阻碍 或绳缆平衡螺丝起子，有助于保持工件台架与工作场地不受干扰地安全工作，生产效率较高，操作者疲劳少，具有较长的起子寿命。

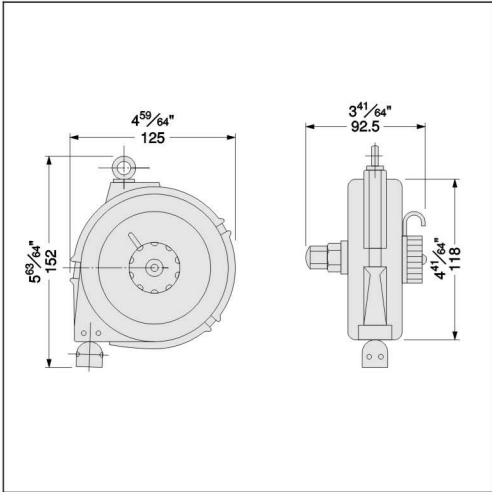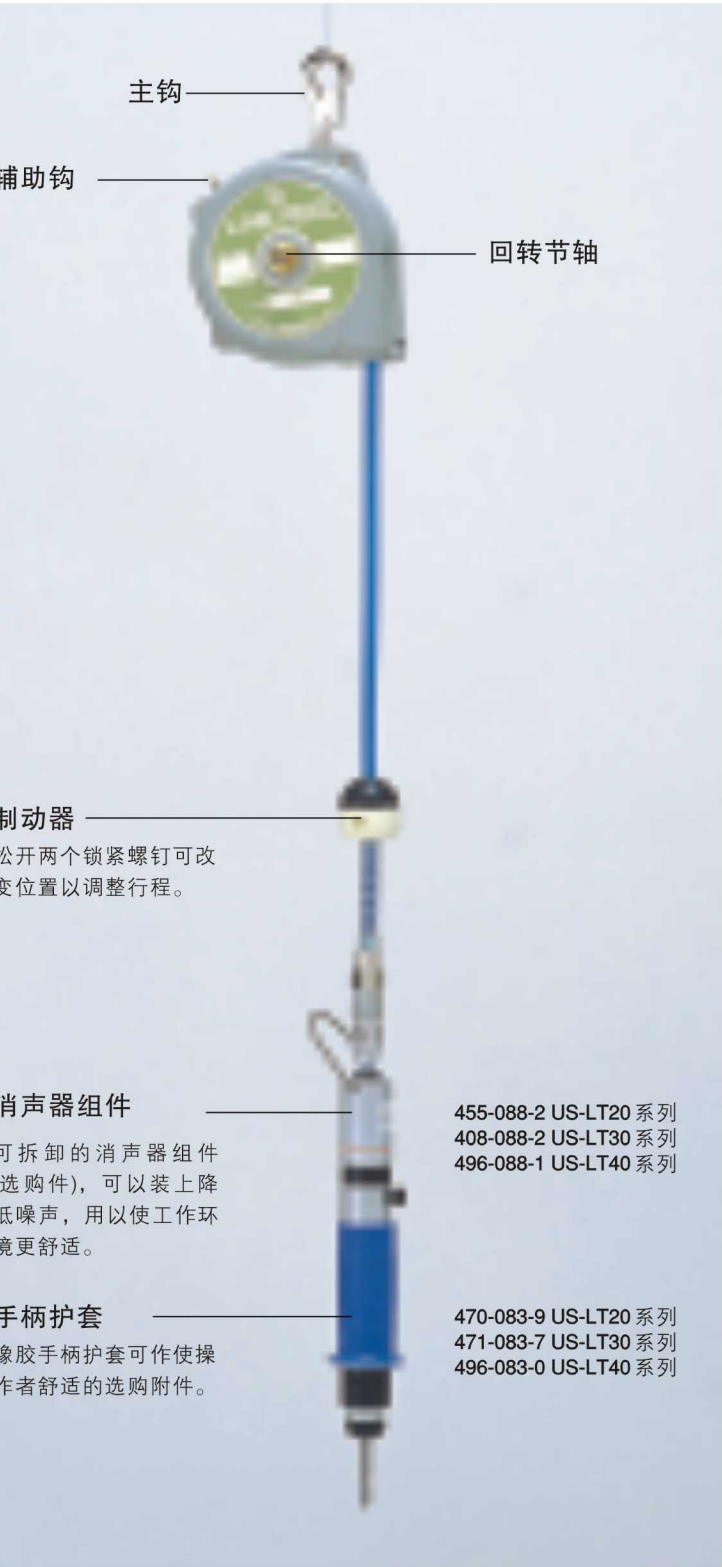

锁紧弹簧
推此处使调整刻度盘松开并反时针回转。

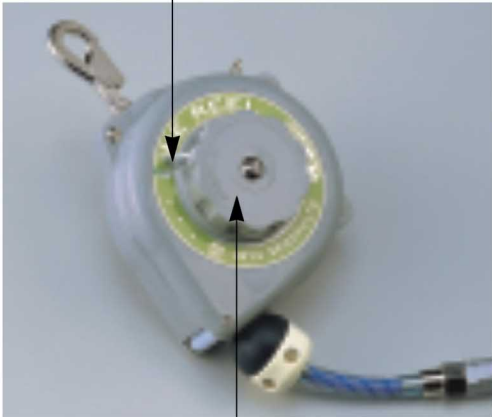

调整刻度盘回转
顺时针方向回转为较重负荷
反时针方向回转为较轻负荷

制动器
松开两个锁紧螺钉可改变位置以调整行程。

消声器组件
可拆卸的消声器组件(选购件)，可以装上降低噪声，用以使工作环境更舒适。

455-088-2 US-LT20 系列
408-088-2 US-LT30 系列
496-088-1 US-LT40 系列

手柄护套
橡胶手柄护套可作使操作者舒适的选购附件。

470-083-9 US-LT20 系列
471-083-7 US-LT30 系列
496-083-0 US-LT40 系列

规格

型式	最大悬挂能力		空气软管尺寸 (内径 × 外径 × 长度)		重量 (约)		最大行程		最大空气压力	
	Kg	lb	mm	in	kg	lb	mm	in	Mpa	psi
LR-09B(200)	1.4	3.08	5 x 8.5 x 2000	13/64 X 21/64 X 78 47/64	1.89	0.86	700	27 9/16	1	142

起子类别	A	US-LT20A, LT30A与40A, US-3.5A, US-40, US-4, US-3.5PA, US-4PB
	B	US-○○, UW-○○D, ALPHA/UX/U-○○D, US-LT10B, LT30B, LT40B, LT50B与LT60, US-5, US-50, US-3, US-3.5PB, US-5PB
	C	US-LT10B
	D	US-3.5MA
	E	US-LT30B-11C与17C, US-LT40B-08C与15C, US-3.5ACB, US-4CA, US-4AA, US-5AA, US-5CA

十字槽刀头

类别	刀头	十字槽NO.1			十字槽NO.2			十字槽NO.3		
		mm (L) in	Code No.		mm (L) in	Code No.		mm (L) in	Code No.	
A		70	2 3/4	916-300-0	70	2 3/4	916-310-0	75	2 61/64	916-320-0
		100	3 15/16	916-301-0	100	3 15/16	916-311-0	120	4 23/32	916-321-0
		120	4 23/32	916-306-0	120	4 23/32	916-316-0	150	5 29/32	916-323-0
		150	5 29/32	916-302-0	150	5 29/32	916-312-0	200	7 7/8	916-322-0
A		70	23/4	916-700-0	70	2 3/4	916-710-0	70	2 3/4	916-710-0
		100	3 15/16	916-701-0	100	3 15/16	916-711-0	100	3 15/16	916-793-0
		120	4 23/32	916-704-0	120	4 23/32	916-714-0	125	4 59/64	916-794-0
		150	5 29/32	916-702-0	150	5 29/32	916-712-0			
B		75	2 61/64	916-400-0	75	2 61/64	916-410-0	75	2 61/64	916-420-0
		100	3 15/16	916-401-0	100	3 15/16	916-411-0	100	3 15/16	916-421-0
		120	4 23/32	916-405-0	120	4 23/32	916-416-0	120	4 23/32	916-426-0
		150	5 29/32	916-402-0	150	5 29/32	916-412-0	150	5 29/32	916-422-0
B		75	2 61/64	916-800-0	75	2 61/64	916-810-0	75	2 61/64	916-820-0
		100	3 15/16	916-801-0	100	3 15/16	916-811-0	100	3 15/16	916-821-0
		120	4 23/32	916-804-0	120	4 23/32	916-814-0	120	4 23/32	916-824-0
		150	5 29/32	916-802-0	150	5 29/32	916-812-0	150	4 29/32	916-822-0
C		十字槽NO.0								
		50	1 31/32	916-135-0						
		十字槽NO.0								
		70	2 3/4	916-136-0						
D		50	1 31/32	916-137-0						
		70	2 3/4	916-138-0						
		十字槽NO.0								
		40	1 37/64	916-530-0	40	1 37/64	916-550-0	40	1 37/64	916-560-0
E		40	1 37/64	916-540-0						
		23	1 37/64	916-500-0	23	29/32	916-510-0	23	29/32	916-520-0
		30	1 37/64	916-501-0	30	1 3/16	916-511-0	30	13/16	916-521-0

*为满足各种应用，可使用5种不同硬度的刀头。
用下列标记字母在所需刀头的零件号后面标注：C(54-58HRC)为标准，A(46-50HRC)，B(50-54HRC)，D(58-62HRC)与E(超过62HRC)。
*两端+字槽NO.3刀头列于表中的B-2中，只在US-6系列与UW-6系列具有为这些型式备有专用起子钻(主轴)时使用。

带槽头刀头与定向套

类别	刀头	全长		零件号NO.	定向套	全长		零件号NO.	定向套	零件号NO.
		mm	in			mm	in			
A		51	2 1/64	916-020-0		19	3/4	917-300-0		917-299-0
		75	2 61/64	916-021-0		43	1 11/16	917-301-0		
		100	3 15/16	916-022-0		68	2 43/64	917-302-0		
		150	5 29/32	916-023-0		118	4 41/64	917-304-0		
B		56	2 13/64	916-030-0		23	29/32	917-400-0		917-350-0
		75	2 61/64	916-031-0		42	1 21/32	917-401-0		
		100	3 15/16	916-032-0		67	2 41/64	917-402-0		
		150	5 29/32	916-033-0		117	4 39/64	917-403-0		
C		49.2	1 15/16	916-084-0		16	5/8	917-031-0	-	-

六角头套筒刀头

类别	六角头套筒刀头	公称螺钉直径	尺寸										零件号NO.
			A		B		C		D		E		
			mm	in	mm	in	mm	in	mm	in	mm	in	
A		M3.5	10.0	25/64	100	3 15/16	3.0	1/8	6.0	16/64	30	1 13/16	918-104-0
			11.0	7/16	100	3 15/16	3.0	1/8	7.0	9/32	30	1 13/16	918-107-0
			11.0	7/16	100	3 15/16	3.5	9/64	7.5	19/64	30	1 13/16	918-108-0
		M5	12.0	15/32	100	3 15/16	4.0	5/32	8.0	5/16	30	1 13/16	918-109-0
			12.0	15/32	100	3 15/16	4.0	5/32	9.0	23/64	30	1 13/16	918-111-0
			13.0	33/64	100	3 15/16	4.5	11/64	9.5	3/8	30	1 13/16	918-112-0
B		M3	9.5	3/8	100	3 15/16	3.0	1/8	5.5	7/32	30	1 13/16	918-202-0
			10.0	25/64	100	3 15/16	3.0	1/8	6.0	15/64	30	1 13/16	918-205-0
		M4	11.0	7/16	100	3 15/16	3.2	1/8	7.0	9/32	30	1 13/16	918-206-0
			12.0	15/32	100	3 15/16	4.5	11/64	8.0	5/16	30	1 13/16	918-208-0
		M5	12.0	15/32	100	3 15/16	4.5	11/64	9.0	23/64	27	1 1/16	918-212-0
			13.0	33/64	100	3 15/16	4.5	11/64	10.0	25/64	27	1 1/16	918-216-0
C		M6	15.0	19/32	100	3 15/16	5.5	7/32	11.0	7/16	27	1 1/16	918-220-0
		M4	11.0	7/16	28	17/64	3.2	1/8	7.0	9/32	7	9/32	918-304-0
			M5	12.0	15/32	28	17/64	4.5	11/64	8.0	5/16	7	5/16
		M6	15.0	19/32	31	17/32	5.5	7/32	10.0	25/64	10	25/64	918-307-0